
# **Multifunction B&W**

# RICOH MP 2554/MP 3054/ MP 3554



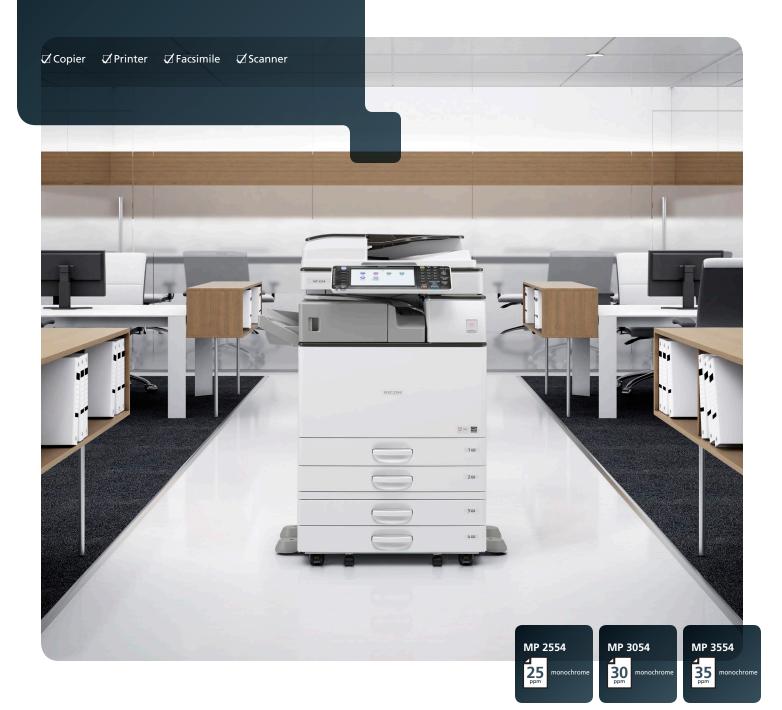

# Expand your business with customized convenience

Who says staying ahead of the competition is difficult? It's easy when you can give your customers the information they need — in multiple formats and multiple ways — quickly, with a host of standard security features. Perform everyday office tasks, including advanced printing, scanning, copying and faxing, from the versatile RICOH® MP 2554/MP 3054/MP 3554. Are projects piling up? Save time with preset shortcuts to frequently used document tasks. You use your smartphone every day. Why not use it to print documents from wherever you are? You can even monitor user activity and energy consumption remotely, and make strategic changes to simplify work and reduce costs.

- Produce up to 35 black-and-white prints/copies per minute
- Mobile printing for exceptional on-the-go performance
- Simplify workflow and perform more tasks without increasing footprint size
- Complete more types of jobs with flexible media handling
- Minimize operating costs with energy-saving features



# Move from job to job effortlessly

Fully featured with advanced tools to make your workday easier

# Perform more types of tasks

Information drives business. You rely on it to make smarter decisions. But what happens when you need to share it with others? How quickly can you get it to them? And is it in the format — either paper or digital — that they prefer? Whether you're printing, copying, scanning or faxing, the compact and affordable Ricoh MP 2554/MP 3054/MP 3554 helps you produce and share information quickly. Take advantage of intuitive one-touch controls, and move on to the next task — whatever it turns out to be — with ease.

# Share information faster

Take too much time on one job, and the next one may not get done. Fortunately, you can easily transition between jobs with the Ricoh MP 2554/MP 3054/MP 3554. Recovery time from sleep mode is less than 5 seconds, so you don't have to stand around waiting when you need to send documents quickly. Print up to 35 black-and-white pages per minute on a wide range of media and handle almost any job. You can also scan up to 79 color or black-and-white images per minute with minimal manual intervention using the standard 100-Sheet Automatic Reversing Document Feeder (ARDF).

# Work from any location

Access information from wherever you are and share it with others using the Ricoh MP 2554/MP 3054/MP 3554. The user-friendly MFP integrates with optional Ricoh HotSpot Enterprise", so you can print directly to the MFP from your mobile device without compromising speed or security. You can also leverage the powerful features and functionality of the Ricoh MP 2554/MP 3054/MP 3554 directly from your smartphone or tablet through the Ricoh Smart Device Connector app. This versatile technology helps you easily connect an NFC-enabled Smart Device to the optional Smart Operation Panel. Users simply touch their Smart Device to the NFC tag on the Smart Operation Panel or scan the QR Code to automatically connect to the MFP allowing copy, print, scan and fax capability directly from their Smart Device.

# Access everything you need with ease

Perform daily tasks more efficiently with the intuitive, simple-to-use interface. Spending too much time re-loading paper? Add optional paper trays to increase paper capacity up to 4,700 sheets for longer, uninterrupted runs. You can even print on thicker stocks up to 11" x 17" without missing a beat. Plus, you can choose from several automated finishers, including a Stapleless Finisher, which received the Summer 2014 BLI Outstanding Achievement Award for Innovation. This 250-Sheet Internal Stapleless Finisher binds up to five sheets of paper with no staples. This unique stapleless finishing technology helps to lower supply costs and expedites future paper recycling and/or shredding needs.










# Keep productivity high in any network environment

# Manage and boost workgroup output

Today's fast paced offices need to work more efficiently. Your workgroup can use the Ricoh MP 2554/MP 3054/MP 3554 — featuring a powerful 533 MHz processor, 2 GB RAM and a 320 GB HDD — to run multiple jobs from multiple users simultaneously, without interruption. You can set quotas or limit output for specific users to encourage faster, more responsible printing. Take advantage of the icon-driven, one-click preset PCL6 user interface to print crisp output up to 1200 dpi in fewer steps.



# Customize workflows to simplify how you work

You know what you need to work faster. So why not customize the Ricoh MP 2554/MP 3054/MP 3554 to meet your specific needs? Personalize the Home Screen with icons to access frequently used tasks with a single touch. Use software like optional GlobalScan<sup>™</sup> NX to transform paper documents into digital form for faster delivery to more people in more places. Add other third-party vendor solutions to simplify content management and other business-critical tasks so you can work with fewer manual touchpoints and minimize errors.

# GSNX for Healthcare Job Log Select a group tab, and then a project. Patient Data Physician Order Referral Articles Image: Comparison of the second secon

# Use familiar technology to navigate key functions quickly


How quickly can you check a text or send an email? With the Ricoh MP 2554/MP 3054/MP 3554, you can print, copy, scan and fax documents and move on to your next project just as quickly. Intuitive drag-and-drop, pinch-and-flick and swipe scrolling simplify routine actions and minimize extraneous choices. It's available via the optional 10.1" Wide Super VGA Smart Operation Panel, which simplifies the choices for the most frequently used functions for Copy, Scanner, and Fax. Do you have users who prefer Ricoh's traditional interface? For workgroups requiring enhanced feature functionality, it is easy to switch between the Quick User Interface functions and Ricoh's traditional user interface.



# We've made it easy to take control

### Use automation to save time

Work is a lot harder when you don't have the right information. Or, when you're spending too much time searching for vital information. Ricoh continues to automate how you capture, retrieve and send data to simplify everyday tasks. With optional embedded OCR scanning, users can create searchable and editable PDF files for advanced indexing and retrieval of their scanned documents. With the optional Ricoh Integrated Cloud Environment (ICE) solution, you can access and manage information from any location via Cloud services for incredible convenience without expensive servers, equipment and maintenance.



### Scan and share the way you want to

Reduce the amount of paper your organization uses — and share information faster and more economically. Because digital documents can be shared in real time, you can work with others to develop strategies and ideas that can be implemented quickly. Whether images are in black-and-white or color, or in PDF, TIFF or JPEG formats, you can get them to the right place via Scan-to-File/Folder/URL/FTP/Email. Compress the size of highly complex, graphics-intensive files and send them just as easily without compromising quality. You can also make scanning easier across your organization with Distributed Scan Management (DSM). Use it to automate document tasks and to set user permissions, rules and delivery preferences to simplify how you manage information.

# Reset Correl Serving Serd Reset Image: Serving Serving Simplified Scrn.

### Send faxes more ways, more places

Manage fax workflow quickly and conveniently by adding optional faxing capabilities. Choose the method that works best for you, whether it's Internet Faxing, LAN faxing or over IP for faster delivery via Super G3 faxing. Using another connected device that doesn't have a fax board? No problem. With the Remote Fax Option, users can send and receive fax documents from any connected device in your fleet — even those without fax options — by sending it through the Ricoh MP 2554/MP 3054/MP 3554. This minimizes the need for additional phone lines and fax boards.



# Help meet today's business challenges with smart, secure multifunction performance


## Protect your documents, and yourself

Every business takes risks daily. Some of them are avoidable. Advanced user authentication helps prevent unauthorized access to documents. Documents are stored at the device until an authorized ID card is swiped using the optional card reader or a passcode is entered at the MFP to release them. For added protection, you can use encrypted PDF transmission to scramble data on confidential PDFs or add watermarks to confidential documents that will appear when unauthorized users attempt to copy them. The DataOverwriteSecurity System (DOSS) automatically overwrites latent images and data on the hard drive to render them unreadable.



### Manage and monitor remotely

With the Ricoh MP 2554/MP 3054/MP 3554, you can see how terms like "efficiency" and "productivity" fit into your workday. Use the intuitive administration controls to automate meter reads, access system settings, streamline firmware updates and more, right from the desktop. Get alerts when supplies are low or maintenance is needed. Monitor usage for specific users or workgroups. And, configure your entire fleet remotely from the easy-to-use, Web browser-based operation panel.



# Minimize energy consumption and operating costs

You wouldn't accept an MFP that stopped being productive once you began using it, so why settle for one that stops being affordable? Choose the Ricoh MP 2554/MP 3054/MP 3554 for low cost-per-page and best in class typical electricity consumption (TEC) values to help support your budgetary needs and sustainability goals. With a shorter print/copy time from sleep mode, the Ricoh MP 2554/MP 3054/MP 3554 keeps up with today's fast-paced business requirements. You can program the device to power on or off during specified times to conserve energy for even greater savings. Plus, the device meets EPEAT<sup>®</sup> Gold criteria — a global environmental rating system for electronic products — and is certified with the latest ENERGY STAR<sup>®</sup> specifications.



Eco-Friendly Indicator Screen as shown on the Smart Operation Panel.

# Streamline document management tasks in small offices and workgroups



- Navigate from job to job easily via the standard, fullcolor, 9" tiltable LCD control panel featuring a USB/ SD card slot and a customizable home screen to link to commonly performed jobs
- 2 Use the standard 100-Sheet Automatic Reversing Document Feeder (ARDF) to efficiently handle one- and two-sided originals for copying, scanning and faxing
- 3 The MP 2554/MP 3054/MP 3554 comes standard with 2 x 550-sheet paper trays for longer, uninterrupted runs
- 4 A standard 100-Sheet Bypass Tray accommodates a wide range of paper sizes and types, including poster printing

- Use the optional 2 x 550-Sheet Paper Trays (shown) for multiple paper sources on demand. Other options include a 1 x 550-Sheet Paper Tray, 2,000-Sheet Tandem Large Capacity Tray, 1,500-Sheet Side Large Capacity Tray (shown) and Type F Cabinet
- Produce professional documents and minimize outsourcing. The optional 1,000-Sheet Booklet Finisher (shown) provides three destinations for output, and can be used to produce paginated, saddle-stitched, punched and folded booklets. Design your own complete document production solution with other optional finishers including a 1,000-Sheet Finisher, 500-Sheet Internal Finisher and 250-Sheet Stapleless Finisher
- 7 The optional 125-Sheet One-Bin Tray (shown) and 250-Sheet Internal Shift-Sort Tray can separate output and simplify document retrieval

# Ricoh MP 2554/MP 3054/MP 3554

SYSTEM SPECIFICATIONS

**RICOH** 

imagine. change.

Engine/Copier Sp		Printer Languages	Standard: PCL5e/6, Optional: Adobe PostScript 3*, IPDS & XPS	Stack Capacity	250 sheets (8.5 " x 11 " or smaller) (A4) 125 sheets (8.5 " x 14 " or larger) (B4 – A3)
Scanning Element	One-Dimensional Solid Scanning	Print Resolution	Up to 1200 x 1200 dpi	Bind Paper Size	8.5" x 11" to 11" x 17" (A4 – A3)
Printing Process	Through CCD Single Laser Beam Scanning &	Font Support	PCL5e/6: 45 Scalable Fonts,	Bind Paper Weight	17 - 20 lb. Bond (64 - 80 g/m <sup>2</sup> )
111111 g 110ccss	Electrophotographic Printing		13 International Fonts	Bind Capacity	Up to 5 sheets
Toner Type	Dry, dual component		PS3: 136 Roman Fonts (optional) IPDS: 108 Roman Fonts (optional)	Bind Position Dimensions (WxDxH)	Top 17.1" x 20.3" x 5.9" (435 x 515 x 150 mm)
Copy Resolution Maximum Copy Quantity	600 x 600 dpi	Standard Features	Sample/Locked/Hold/Stored Print	500-Sheet Internal Finis	
First Page Out Time	4.6 Seconds for MP 2554/MP 3054	*Requires optional SD Card for	or Netware		5.5" x 8.5" – 12" x 18" (A6 – A3)
-	4.3 Seconds for MP 3554	Scan Specificatio	ns (Standard)		t 14 – 80 lb. Bond/166 lb. Index (52 – 300 g/m²)
Warm-Up Time	14 seconds with Standard Operation Panel	Scan Speed	200/300 dpi: 79 ipm (Letter)	Stack Capacity	500 sheets (8.5" x 11" or smaller) (A4) 250 sheets (8.5" x 14" or larger) (B4 – A3)
Recovery From Sleep	4.7 seconds	(B&W & Full Color)	200/300 dpi: 80 ipm (A4)	Staple Paper Size	8.5" x 11" to 11" x 17" (A4 – A3)
Mode		Scan Resolution	Color & B/W: Up to 600 dpi TWAIN: Up to 1200 dpi	Staple Paper Weight	14 – 28 lb. Bond (52 – 105 g/m <sup>2</sup> )
Memory (Standard/Maximum)	2 GB RAM + 320 GB HDD (Shared)	Platen Size	Up to 11" x 17"	Staple Capacity	50 sheets (8.5" x 11") (A4) 30 sheets (8.5" x 14" or larger, and/or
Original Type	Book/Sheet/Object	Connection Type	Standard: 10Base-T/100/1000BaseTX Ethernet		Mixed Sizes) (B4 – A3)
Maximum Original Size	Up to 11" x 17"	Protocol	Optional: IEEE 802.11a/b/g/n Wireless LAN TCP/IP, NCP*, SMB, SMTP, POP, LDAP,	Staple Positions	Top, Bottom, 2 Staples
B&W Print Speed (Letter/A4)	MP 2554: 25 prints/minute MP 3054: 30 prints/minute	FIOLOCOI	FTP, IMAP4	Dimensions (WxDxH)	21.5" x 20.6" x 6.7" (546 x 523 x 170 mm)
(Letter/A4)	MP 3554: 35 prints/minute	File Formats	Single and Multi-Page TIFF/PDF,	2-/3-Hole Punch Unit (P (Optional; Installs inside SF	
Power Source	120V/60Hz/12A		High Compression PDF, PDF/A and Single-Page JPEG		
Typical Electricity	MP 2554: 0.9 kWh/week MP 3054: 1.1 kWh/week	Standard Features	Embedded Scan-to-Email/Folder/URL,	1,000-Sheet Finisher (SR	Proof Tray: 5.5" x 8.5" – 11" x 17" (A6 – A3)
Consumption (TEC)**	MP 3554: 1.1 kWh/week		TWAIN and Color Scanning	Supported raper Sizes	Shift Tray: 5.5" x 8.5" – 11" x 17" (A6 – A3)
Standard Paper	1,200 sheets (550 sheets x 2 trays,	*Requires optional SD Card for	or Netware	Supported Paper Weight	Proof Tray: 14 – 45 lb. Bond/93 lb. Index
Capacity	and 100-Sheet Bypass Tray)	Fax Specification	s (Option)		(52 – 169 g/m²) Shift Tray: 14 – 80 lb. Bond/166 lb. Index
Maximum Paper Capacity	4,700 sheets (w/Tandem LCT + Side LCT)	Fax Option Type M12			(52 – 300 g/m <sup>2</sup> )
	Plain Paper, Transparencies*, Letterhead,	Circuit	PSTN, PBX	Stack Capacity	Proof Tray: 250 sheets (8.5" x 11") (A4)
	Color Paper, Pre-Punched Paper, Labels*,	Compatibility Resolution	ITU-T G3 200 x 200/100 dpi		50 sheets (8.5" x 14" or larger) (B4) Shift Tray: 1,000 sheets (8.5" x 11") (A4)
Supported Paper Sizes	Envelopes, Cardstock, Recycled Bypass Tray: 5.5" x 8.5" – 12" x 18"		400 x 400 dpi (optional)		500 sheets (8.5" x 14" or larger) (B4)
supported raper sizes	(Á6 – A3)	Compression Method	MH, MR, MMR, JBIG	Staple Capacity	50 sheets (8.5" x 11") (A4)
	Tray 1 & 2: 5.5" x 8.5" – 11" x 17"	Scanning Speed (LEF) Modem Speed	Up to 68 spm (Letter/A4) 33.6 Kbps with auto fallback	Charle Danas Cine	30 sheets (8.5" x 14" or larger) (B4)
Supported Paper	(A5 – A3) Duplex: 14 – 68 lb. Bond (52 – 256 g/m <sup>2</sup> )	Transmission Speed	G3: 3 seconds per page (MMR Compression)	Staple Paper Size Staple Paper Weight	8.5" x 11" – 11" x 17" (A4 – A3) 14 – 28 lb. Bond (52 – 105 g/m²)
Weights	Bypass: 14 – 80 lb. Bond (52 – 300 g/m <sup>2</sup> )	CAT 14	G3: 2 seconds per page (JBIG Compression)	Staple Positions	Top, Bottom 2 Staples
- -	Tray 1 & 2: 16 – 80 lb. Bond (60 – 300 g/m <sup>2</sup> )	SAF Memory	4 MB standard/60 MB maximum 320 pages/4,800 pages	Dimensions (WxDxH)	22.2" x 24.4" x 37.8" (563 x 620 x 960 mm)
Standard Output Capacity Maximum Output	1,625 sheets (Bridge Unit + 1 Bin +	Max Auto Dials	2,000	1,000-Sheet Booklet Fini	
Capacity	1,000-Sheet Finisher)	Group Dials	100 (max. 500 numbers per group)	Supported Paper Sizes	Proof Tray: 5.5" x 8.5" – 11" x 17" (A6 – A3) Shift Tray: 5.5" x 8.5" – 11" x 17" (A6 – A3)
Document Feeder Type	Standard Automatic Reversing Document	Standard Features	Dual Access, Duplex Reception, Image Rotation, 1 Hour Backup, LAN-Fax Capability,		Booklet Tray: 8.5" x 11" – 11" x 17" (A4 – A3)
Document Feeder	Feeder (ARDF) 5.5" x 8.5" – 11" x 17" (A5 – A3)		Internet Faxing (T.37), IP Faxing (T.38),	Supported Paper Weight	t Proof Tray: 14 – 45 lb. Bond (52 – 169 g/m <sup>2</sup> )
Original Size		Ontinenal Frantsures	Fax Forwarding to E-Mail/HDD/Folder		Shift Tray: 14 – 80 lb. Bond/166 lb. Index (52 – 300 g/m <sup>2</sup> )
Document Feeder	Simplex: 11 – 34 lb. Bond (40 – 128 g/m²)	Optional Features	Simultaneous Operation of up to 3 lines (G3 x 3)		Booklet Tray: 14 – 28 lb. Bond (52 – 105 g/m²)
Paper Weight Document Feeder Capacit	Duplex: 13 – 34 lb. Bond (52 – 128 g/m <sup>2</sup> ) v 100 sheets	C		Stack Capacity	Proof Tray: 250 sheets (8.5" x 11" or smaller)
Preset Reduction &	25%, 50%, 65%, 73%, 78%, 85%, 93%,	Security Features			(A4) 50 sheets (8.5" x 14" or larger) (B4 – A3)
Enlargement Ratios	100%, 121%, 129%, 155%, 200%, 400%				
			/MIME, IPsec Communication, Locked . Address Book Encryption, SSL, User		Shift Tray: 1,000 sheets (8.5" x 11" or
Zoom Range	25% to 400% in 1% increments	Print Password Encryption Authentication, Quota Se	n, Address Book Encryption, SSL, User tting/Account Limit, SNMP v3, SMTP		Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4)
	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border	Print Password Encryption	n, Address Book Encryption, SSL, User tting/Account Limit, SNMP v3, SMTP		Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3)
Zoom Range	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover	Print Password Encryption Authentication, Quota Se	n, Address Book Encryption, SSL, User tting/Account Limit, SNMP v3, SMTP ion		Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4)
Zoom Range	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>re Accessories</li> </ul>		Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets)
Zoom Range	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel,	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab	n, Address Book Encryption, SSL, User tting/Account Limit, SNMP v3, SMTP ion re Accessories inet Options	Staple Capacity	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (84 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4),
Zoom Range	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa	n, Address Book Encryption, SSL, User tting/Account Limit, SNMP v3, SMTP ion re Accessories inet Options	Staple Capacity	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets)
Zoom Range	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip	Print Password Encryptior Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank ( Paper Capacity Supported Paper Sizes	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ire Accessories</li> <li>inet Options</li> <li>PB3150)<sup>15</sup> 550 sheets x 1 tray</li> <li>5.5* x 8.5* to 11* x 17* (A5 – A3)</li> </ul>	Staple Capacity Staple Paper Size	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17"
Zoom Range Standard Features	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh	1, Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion rec Accessories inet Options *B3150) <sup>15</sup> 550 sheets x 1 tray 5.5" x 8.5" to 11" x 17" (A5 – A3) t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)		Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3)
Zoom Range Standard Features Dimensions (WxDxH)	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1* x 26.8* x 35.9*	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt <b>Optional Hardwa</b> <b>Paper Handling &amp; Cab</b> <b>One-Tray Paper Bank (</b> Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH)	<ul> <li>Address Book Encryption, SSL, User tting/Account Limit, SNMP v3, SMTP ion</li> <li>rec Accessories</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m')</li> <li>23.1" x 27" x 4.7" (587 x 685 x 120 mm)</li> </ul>	Staple Paper Size	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17"
Zoom Range Standard Features	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypi <b>Optional Hardwa</b> Paper Handling & Cab One-Tray Paper Bank ( Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Two-Tray Paper Bank ( Paper Capacity	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>re Accessories</li> <li>inet Options</li> <li>PB3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>557 x 857 to 11* x 17* (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1* x 27* x 4.7* (587 x 685 x 120 mm)</li> <li>PB3220)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> </ul>	Staple Paper Size Staple Paper Weight	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3)
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1* x26.8* x35.9* (587 x 680 x 913 mm) 151 lbs., 68.5 kg	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Viegh Dimensions (WxDxH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes	1, Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion ion re Accessories inet Options *B3150) <sup>15</sup> 550 sheets x 1 tray 5.5° x 8.5° to 11° x 17° (A5 – A3) t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m?) 23.1° x 27° x 4.7° (587 x 685 x 120 mm) *B3220) <sup>1</sup> 1,100 sheets (550 sheets x 2 trays) 5.5° x 8.5° to 11° x 17° (A5 – A3)	Staple Paper Size Staple Paper Weight Staple Positions	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) 14 – 28 lb. Bond (52 – 105 g/m') Top, Bottom, 2 Staples, Booklet
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Soring, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (587 x 680 x 913 mm)	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwaa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh	<ul> <li>h, Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>inet Options</li> <li>pB3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1" x 27" x 4.7" (S87 x 65 x 120 mm)</li> <li>PB3220)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH)	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) 14 – 28 lb. Bond (52 – 105 g/m') Top, Bottom, 2 Staples, Booklet 22.2" x 24.4" x 37.8" (563 x 620 x 960 mm)
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1* x26.8* x35.9* (S87 x 680 x 913 mm) 151 lbs., 68.5 kg Ion by ENERGY STAR program	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypi <b>Optional Hardwa</b> <b>Paper Handling &amp; Cab</b> <b>One-Tray Paper Bank (</b> Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) <b>Two-Tray Paper Bank (</b> Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH)	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>Inter Accessories</li> <li>inet Options</li> <li>PB3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m')</li> <li>23.1" x 27" x 4.7" (S87 x 685 x 120 mm)</li> <li>PB3220)<sup>1</sup></li> <li>1.100 sheets (550 sheets x 2 trays)</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/16 lb. Index (60 – 300 g/m')</li> <li>23.1" x 27" x 9.7" (S87 x 685 x 247 mm)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDXH) 2-/3-Hole Punch Unit (P	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) 14 – 28 lb. Bond (52 – 105 g/m') Top, Bottom, 2 Staples, Booklet 22.2" x 24.4" x 37.8" (563 x 620 x 960 mm)
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Wagazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (587 x 680 x 913 mm) 151 lbs., 68.5 kg Ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Viegh Dimensions (WxDxH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Viegh Dimensions (WxDxH) Tandem Large Capacity Paper Capacity	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>inet Options</li> <li>P39150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5° x 8.5° to 11° x 17° (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1° x 27° x 4.7° (587 x 685 x 120 mm)</li> <li>P83200)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5° x 8.5° to 11° x 17° (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> <li>7 Tray (P83230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SP	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – 28) Ib. Bond (52 – 105 g/m') Top, Bottom, 2 Staples, Booklet 22.2" x 24.4" x 37.8" (563 x 620 x 960 mm) U3050NA) B3150 or SR3140 Finishers)
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only *Typical electricity consumpt <b>Print Specification</b>	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, D Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1 * 26.8 * 35.9 * (587 x 680 x 913 mm) 151 Ibs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypi <b>Optional Hardwa</b> Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ine Accessories</li> <li>inet Options</li> <li>PB3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>55'x 8.5' to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1" x 27" x 4.7" (S87 x 685 x 120 mm)</li> <li>PB3220)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1" x 27" x 9.7" (S87 x 685 x 247 mm)</li> <li>7 Tay (PB3230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5" x 11" (A4)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF Additional Access	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) 14 – 28 lb. Bond (52 – 105 g/m') Top, Bottom, 2 Staples, Booklet 22.2" x 24.4" x 37.8" (563 x 620 x 960 mm) U3050NA) 83150 or SR3140 Finishers) cory Options
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Wagazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (587 x 680 x 913 mm) 151 lbs., 68.5 kg Ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Weigh Dimensions (WxDxH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Tandem Large Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ine</li> <li>ine</li> <li>Accessories</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>2.3.1" x 27" x 4.7" (587 x 685 x 120 mm)</li> <li>*B3220)<sup>1</sup></li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>2.3.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>7tray (PB3230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside Sf Additional Accesss Bridge Unit BU3070, Brow Type 3352, Copy Data Sec	Shift Tray: 1,000 sheets $(8.5^{\circ} \times 11^{\circ} \text{ or smaller})$ (A4) 500 sheets $(8.5^{\circ} \times 14^{\circ} \text{ or larger})$ (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets $(8.5^{\circ} \times 14^{\circ} \text{ or larger})$ (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5^{\circ} \times 11^{\circ} – 11^{\circ} \times 17^{\circ} (A4 – A3) Saddle Stitch: 8.5^{\circ} $\times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ (A4 – A3) 14 – 28 lb. Bond (52 – 105 g/m') Top, Bottom, 2 Staples, Booklet 22.2^{\circ} $\times 24.4^{\circ} \times 37.8^{\circ}$ (563 $\times 620 \times 960 \text{ mm}) U3050NA) U3050NA Ser Unit Type M12, Card Reader Bracket urity Unit Type G, Embedded HotSpot$
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1 * 26.8 * x 35.9 * (S87 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A,	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Vieigh Dimensions (WxDxH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Vieigh Dimensions (WxDxH) Tandem Large Capacity Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Vieigh Dimensions (WxDxH)	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ioio</li> <li>ine Accessories</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5° x 8.5° to 11° x 17° (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1° x 27° x 4.7° (587 x 685 x 120 mm)</li> <li>*B3220)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5° x 8.5° to 11° x 17° (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> <li>7 tray (P83230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5° x 11° (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> </ul>	Staple Paper Size Staple Positions Dimensions (WxDXH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF Additional Access Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type 5, ESP XG-PCS-15D, 1	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 10" (A4 – A3) Saddle Stitch: 8.5" x 10" (A4 – A3) Saddle Stitch: 8.5" x 10" (A4 – A4) Saddle
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Wagazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (587 x 680 x 913 mm) 151 lbs., 68.5 kg Ion by ENERGY STAR program <b>DS (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Weigh Dimensions (WxDxH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Tandem Large Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ioio</li> <li>ine Accessories</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5° x 8.5° to 11° x 17° (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1° x 27° x 4.7° (587 x 685 x 120 mm)</li> <li>*B3220)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5° x 8.5° to 11° x 17° (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> <li>7 tray (P83230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5° x 11° (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF Additional Access Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type 5, ESP XG-PCS-15D, 1 Converter Type E, G3 Inter	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) 500 sheets (8.5" x 14" or larger) (B4 – A3) 500 sheets (8.5" x 14" or larger) (B4 – A3) 50 sheets (8.5" x 10 - 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) 5addle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) 5addle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) 14 – 28 lb. Bond (52 – 105 g/m') Top, Bottom, 2 Staples, Booklet 22.2" x 24.4" x 37.8" (563 x 620 x 960 mm) U3050NA) 13150 or SR140 Finishers) 5ery Options 5er Unit Type M12, Card Reader Bracket urity Unit Type M12, File Format face Unit Type M12, IEE 1284 Interface
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1 * 26.8 * x 35.9 * (S87 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A,	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Tandem Large Capacity Paper Capacity Supported Paper Sizes Supported Paper Sizes	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ioio</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5° x 8.5° to 11° x 17° (A5 - A3)</li> <li>t 16 - 80 lb. Bond/166 lb. Index (60 - 300 g/m²)</li> <li>23.1° x 27° x 4.7° (587 x 685 x 120 mm)</li> <li>*B3220)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5° x 8.5° to 11° x 17° (A5 - A3)</li> <li>t 16 - 80 lb. Bond/166 lb. Index (60 - 300 g/m²)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> <li>7 tray (PB3230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5° x 11° (A4)</li> <li>t 16 - 80 lb. Bond/166 lb. Index (60 - 300 g/m²)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> <li>yg (RT3030)<sup>4</sup></li> <li>1,500 sheets</li> <li>8.5° x 11° (A4)</li> </ul>	Staple Paper Size Staple Positions Dimensions (WxDXH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF Additional Access Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type 5, ESP XG-PCS-15D, I Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 50000000000000000000000000000000000
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Wagazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (587 x 680 x 913 mm) 151 lbs., 68.5 kg Ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2p orts on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802.11a/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 1824 Parallel	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypi <b>Optional Hardwa</b> Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Tandem Large Capacity Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ine</li> <li>ine</li> <li>ine</li> <li>Control Control C</li></ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF Additional Access Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type S, ESP XG-PCS-15D, 1 Converter Type E, G3 Inter Board Type A, IEEE 802.111 Type M12, Key Counter BF 64MB, OCR Unit Type M2	Shift Tray: 1,000 sheets $(8.5" \times 11"$ or smaller) (A4) 500 sheets $(8.5" \times 14"$ or larger) $(B4 - A3)$ Booklet Tray: 20 Sets $(2 - 5$ sheets), 10 Sets $(6 - 10$ sheets) & 7 Sets $(11 - 15$ sheets) Normal Staple: 50 sheets $(8.5" \times 11")$ (A4), 30 sheets $(8.5" \times 14"$ or larger) $(B4 - A3)$ Saddle Stitch: 15 sheets Normal Staple: $8.5" \times 11" - 11" \times 17"$ (A4 - A3) Saddle Stitch: $8.5" \times 11" - 11" \times 17"$ Saddle Stitch: $8.5" \times 11" - 11" \times 17"$ Sature Stitch: $8.5" \times 11" - 11" \times 17"$ Sature Stitch: $8.5 \times 10^{-1}$ Sature Stitch: $8.5 \times 10^{-1}$ Sature Stitch: $8.5 \times 10^{-1}$ Satur
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1 * 26.8 * x 35.9 * (587 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, US82.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: Ete 802.114/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 1284 Parallel TCP/PI (IPv4, IPv5), INVSPX*	Print Password Encryption Authentication, Quota Se over SSL and PDF encryption <b>Optional Hardwa</b> Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Sizes	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ioio</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5° x 8.5° to 11° x 17° (A5 - A3)</li> <li>t 16 - 80 lb. Bond/166 lb. Index (60 - 300 g/m²)</li> <li>23.1° x 27° x 4.7° (587 x 685 x 120 mm)</li> <li>*B3220)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5° x 8.5° to 11° x 17° (A5 - A3)</li> <li>t 16 - 80 lb. Bond/166 lb. Index (60 - 300 g/m²)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> <li>7 tray (PB3230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5° x 11° (A4)</li> <li>t 16 - 80 lb. Bond/166 lb. Index (60 - 300 g/m²)</li> <li>23.1° x 27° x 9.7° (587 x 685 x 247 mm)</li> <li>yg (RT3030)<sup>4</sup></li> <li>1,500 sheets</li> <li>8.5° x 11° (A4)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside Sf Additional Access Bridge Unit BU3070, Brow Type 352, Copy Data Sec Type S, ESP XG-PCS-15D, I Converter Type E, G3 Inter Board Type M, IEEE 802.11 Type M12, Key Counter B 64MB, OCR Unit Type M12 PostScript3 Unit Type M12	Shift Tray: 1,000 sheets $(8.5" \times 11"$ or smaller) (A4) 500 sheets $(8.5" \times 14"$ or larger) $(B4 - A3)$ Booklet Tray: 20 Sets $(2 - 5$ sheets), 10 Sets $(6 - 10$ sheets) & 7 Sets $(11 - 15$ sheets) Normal Staple: 50 sheets $(8.5" \times 11")$ (A4), 30 sheets $(8.5" \times 14" \circ 1 arger) (B4 - A3)$ Saddle Stitch: 15 sheets Normal Staple: 8.5" $\times 11" - 11" \times 17"$ (A4 - A3) Saddle Stitch: 8.5" $\times 11" - 11" \times 17"$ (A4 - A3) Saddle Stitch: 8.5" $\times 11" - 11" \times 17"$ (A4 - A3) Saddle Stitch: 8.5" $\times 11" - 11" \times 17"$ (A4 - A3) Saddle Stitch: 8.5" $\times 11" - 11" \times 17"$ $(2.2" \times 24.4" \times 37.8" (563 \times 620 \times 960 \text{ mm})U3050NA)Sator SR3140 Finishers)Scorp OptionsSer Unit Type M12, Card Reader Bracketurity Unit Type G, Embedded HotSpotFax Connection Unit Type M12, File Formatface Unit Type M12, IEEE 1284 Interfaceab/g/n Interface Unit Type M12, OPS Unitacket Type M3, Memory Unit Type M12,Optional Counter Interface Unit Type M12,Optional Counter Printing Type M12,Sb Card for NetWare Printing Type M12,$
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (S87 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802.11a/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 124 Parallel TCP/P (IPv4, IPv6), IPX/SPX* Windows Vista7//8/XP, Windows Server 2003/2008R2/2008/2/2018/2012/2012R2;	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypi <b>Optional Hardwa</b> Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Tandem Large Capacity Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ine</li> <li>ine</li> <li>ine</li> <li>Control Control C</li></ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF Additional Access Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type 5, ESP XG-PCS-15D, 1 Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter B 64MB, OCR Unit Type M12 Smart Card Reader Built-in Type M3, XPS Direct Print	Shift Tray: 1,000 sheets $(8.5" \times 11"$ or smaller) (A4) 500 sheets $(8.5" \times 14"$ or larger) $(B4 - A3)$ Booklet Tray: 20 Sets $(2 - 5$ sheets), 10 Sets $(6 - 10$ sheets) & 7 Sets $(11 - 15$ sheets) Normal Staple: 50 sheets $(8.5" \times 11")$ (A4), 30 sheets $(8.5" \times 14"$ or larger) $(B4 - A3)$ Saddle Stitch: 15 sheets Normal Staple: $8.5" \times 11" - 11" \times 17"$ (A4 - A3) Saddle Stitch: $8.5" \times 11" - 11" \times 17"$ Saddle Stitch: $8.5" \times 11" - 11" \times 17"$ Sature Stitch: $8.5" \times 11" - 11" \times 17"$ Sature Stitch: $8.5 \times 10^{-1}$ Sature Stitch: $8.5 \times 10^{-1}$ Sature Stitch: $8.5 \times 10^{-1}$ Satur
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1 * 26.8 * x 35.9 * (587 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, US82.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEE 802.114/Ds/gn/Wireless LAN, USB Device Server (second NIC), & IEEE 1284 Parallel TCP/PI (IPv4, IPv6), IPV/SPX* Windows Vistar/78/XP, Windows Server 2003/2003R2/2008/2008R2/2012/2012R2;	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Vieigh Dimensions (WXDXH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Tandem Large Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Side Large Capacity Tre Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Side Large Capacity Supported Paper Weigh Dimensions (WXDXH) Cabinet Type F <sup>1</sup>	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ine</li> <li>ine</li> <li>ine</li> <li>Accessories</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1" x 27" x 4.7" (587 x 685 x 120 mm)</li> <li>*B3220)<sup>1</sup></li> <li>1.100 sheets (550 sheets x 2 trays)</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Tray (PB3230)<sup>1</sup></li> <li>2.000 sheets (1,000 sheets x 2)</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>yy (RT3030)<sup>4</sup></li> <li>1.500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>1.34" x 21.4" x 11.4" (340 x 545 x 290 mm)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside Sf Additional Accesss Bridge Unit BU3070, Brow Type 352, Copy Data Sec Type S, ESP XG-PCS-15D, 1 Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br 64MB, OCR Unit Type M12 Smart Card Reader Built-ir Type M3, XPS Direct Print Option Type M12	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5"
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Wagazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, B Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (587 x 680 x 913 mm) 151 lbs., 68.5 kg Ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, SD slot Star/BarXP, Windows Server 2003/2008R2/2008/2008R2/2012/2012R2; Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer,	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypi Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (1 Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Two-Tray Paper Bank (1 Paper Capacity Supported Paper Veigh Dimensions (WxDxH) Tandem Large Capacity Supported Paper Veigh Dimensions (WxDxH) Side Large Capacity Supported Paper Weigh Dimensions (WxDxH) Side Large Capacity Supported Paper Weigh Dimensions (WxDxH) Cabinet Type F <sup>1</sup> Dimensions (WxDxH)	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ine</li> <li>ine</li> <li>Control Control Contro</li></ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF <b>Additional Access</b> Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type 3522, Copy Data Sec Type 5, SEP XG-PCS-15D, I Converter Type F, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br 64MB, OCR Unit Type M2, PostScript3 Unit Type M12 Smart Card Reader Built-ir Type M3, XPS Direct Print Option Type M12 Note: Some accessories requin	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" s 17" (A4 – A3) Saddle Stitch: 8.5"
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 1ob Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1 * 26.8 * 35.9 * (S87 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, US82.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, US82.0 Type A, US82.0 Type B, & SD Card Slot Optional: IEEE 802.114/0/gn/ Wireless LAN, US8 Device Server (second NIC), & IEEE 1284 Parallel TCP/PI (Ptv, IPv/SPX* Windows Vistar/7/8/XP, Windows Server 2003/2003R2/2008/2008R2/2012/2012R2; Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer, Red Hat Linux, IBM AIX, Mac OS X 10.6 or later, SAP N3, NDPS Gateway, IBM	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Vieigh Dimensions (WxDxH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Vieigh Dimensions (WxDxH) Tandem Large Capacity Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Side Large Capacity T Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Cabinet Type F <sup>1</sup> Dimensions (WxDxH) Weight	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>re Accessories</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 120 mm)</li> <li>*B3220)<sup>1</sup></li> <li>1.100 sheets (550 sheets x 2 trays)</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Tray (PB3230)<sup>1</sup></li> <li>2.000 sheets (1,000 sheets x 2)</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Tray (PB3230)<sup>1</sup></li> <li>1.500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Y Tay (73030)<sup>4</sup></li> <li>1.500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Y RT3030)<sup>4</sup></li> <li>1.500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>13.4" x 21.4" x 11.4" (340 x 545 x 290 mm)</li> <li>23.1" x 26.7" x 10" (586 x 679 x 256 mm)</li> <li>Less than 29.3 lbs. (13.25 kg)</li> <li>er Options</li> <li>(\$H3070)<sup>2</sup></li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF <b>Additional Access</b> Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type 3522, Copy Data Sec Type 5, SEP XG-PCS-15D, I Converter Type F, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br 64MB, OCR Unit Type M2, PostScript3 Unit Type M12 Smart Card Reader Built-ir Type M3, XPS Direct Print Option Type M12 Note: Some accessories requin	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) C44 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 12" – 11" x 17" (A4 – 28] Saddle St
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Wagazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (587 x 680 x 913 mm) 151 lbs., 68.5 kg Son by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802.11a/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 1284 Parallel TCP/IP (IPv4, IPv6), IPX/SPX* Windows Vista7//8X/Ry Windows Server 2003/2003R2/2008/2008R2/2012/2012R2; Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer, Red Hat Linux, IBM AIX, Mac OS X 10.6 or later, SAP R/3, NDPS Gateway, IBM	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypi Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDXH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WxDXH) Side Large Capacity Tra Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WxDXH) Cabinet Type F <sup>1</sup> Dimensions (WxDXH) Cabinet Type F <sup>1</sup> Dimensions (WxDXH) Weight Output Trays & Finish	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ion</li> <li>ine Options</li> <li>PB3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>55' x 85' to 11' x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m')</li> <li>23.1" x 27" x 4.7" (S87 x 685 x 120 mm)</li> <li>PB3220)<sup>1</sup></li> <li>16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m')</li> <li>23.1" x 27" x 9.7" (S87 x 685 x 247 mm)</li> <li>7 Tray (PB3230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8,5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m')</li> <li>23.1" x 27" x 9.7" (S87 x 685 x 247 mm)</li> <li>7 Tray (PB3230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8,5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m')</li> <li>23.1" x 27" x 9.7" (S87 x 685 x 247 mm)</li> <li>ry (RT3030)<sup>4</sup></li> <li>1,500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m')</li> <li>23.1" x 27. x 9.7" (S87 x 685 x 247 mm)</li> <li>ry (RT3030)<sup>4</sup></li> <li>1,500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m')</li> <li>23.1" x 26.7" x 10" (S86 x 679 x 256 mm)</li> <li>Less than 29.3 lbs. (13.25 kg)</li> <li>er Options</li> <li>(SH3070)<sup>2</sup></li> <li>250 sheets (8.5" x 11" or smaller) (A4 – A5)</li> </ul>	Staple Paper Size Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF <b>Additional Access</b> Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type S, ESP XG-PCS-15D, I Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br 64MB, OCR Unit Type M2 PostScript3 Unit Type M12 Smart Card Reader Built-ir Type M3, XPS Direct Print Option Type M12 Note: Some accessories requir for other options. Some image stabilizers that ship with the o Some options may not be avai	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 50000000000000000000000000000000000
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (S87 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> S33MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel, SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802. 11a/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 1284 Parallel TCP/P (IPv4, IPv6), IPV/SPX* Windows Vista/7/8/XP, Windows Server 2003/2003/2008/2008/22012/2012R2; Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer, Red Hat Linux, IBM AIX, Mac OS X 10.6 or later, SAP K93, NDPS Gateway, IBM iSeries/AS/400" using OS/400 Host Print Transform, Citrix Presentation Server 4.5/	Print Password Encryption Authentication, Quota Se over SSL and PDF encryption <b>Optional Hardwa</b> Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) <b>Two-Tray Paper Bank</b> (I Paper Capacity Supported Paper Sizes Supported Paper Sizes Suppo	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>re Accessories</li> <li>inet Options</li> <li>*B3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 120 mm)</li> <li>*B3220)<sup>1</sup></li> <li>1.100 sheets (550 sheets x 2 trays)</li> <li>5.5" x 8.5" to 11" x 17" (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Tray (PB3230)<sup>1</sup></li> <li>2.000 sheets (1,000 sheets x 2)</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Tray (PB3230)<sup>1</sup></li> <li>1.500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Y Tay (73030)<sup>4</sup></li> <li>1.500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>23.1" x 27" x 9.7" (587 x 685 x 247 mm)</li> <li>*Y RT3030)<sup>4</sup></li> <li>1.500 sheets</li> <li>8.5" x 11" (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m)</li> <li>13.4" x 21.4" x 11.4" (340 x 545 x 290 mm)</li> <li>23.1" x 26.7" x 10" (586 x 679 x 256 mm)</li> <li>Less than 29.3 lbs. (13.25 kg)</li> <li>er Options</li> <li>(\$H3070)<sup>2</sup></li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3Hole Punch Unit (P (Optional; Installs inside SF <b>Additional Access</b> Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type S, ESP XG-PCS-15D, 1 Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br 64MB, OCR Unit Type M2, PostScript3 Unit Type M12 Smart Card Reader Built-ir Type M3, XPS Direct Print Option Type M12 Note: Some accessories requir for other options. Some image stabilizers that ship with the o Some options may not be ava Specifications are subject to d	Shift Tray: 1,000 sheets ( $8.5^* \times 11^*$ or smaller) (A4) 500 sheets ( $8.5^* \times 14^*$ or larger) (B4 – A3) Booklet Tray: 20 Sets ( $2 - 5$ sheets), 10 Sets ( $6 - 10$ sheets), $8 7$ Sets ( $11 - 15$ sheets) Normal Staple: 50 sheets ( $8.5^* \times 11^*$ ) (A4), 30 sheets ( $8.5^* \times 14^*$ or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: $8.5^* \times 11^* - 11^* \times 17^*$ (A4 – A3) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ (A4 – A3) Addle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ (A4 – A3) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ (A4 – A3) A – 28 lb. Bond ( $52 - 105 \ g/m$ ) Top, Bottom, 2 Staples, Booklet 22.2* $\times 24.4^* \times 37.8^*$ ( $563 \times 620 \times 960 \ mm$ ) U3050NA) Correct Connection Unit Type M12, File Format face Unit Type M12, Card Reader Bracket urity Unit Type M12, Card Reader Bracket urity Unit Type M12, Card Reader Bracket urity Unit Type M12, Card Reader Bracket Unit Type M12, USE Device Server a additional equipment or may be prerequisites the contained in this brochure do not show the ptional paper feed units. Iable at the time of market release. tange without notice.
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only *Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating Systems	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (S87 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> S33MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802.11a/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 1284 Parallel TCP/P (IPv4, IPv6), IPX/SPX* Windows Vista7//8/XP, Windows Server 2003/2008/2/2008/2/2012/2012R2, Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer, Red Hat Linux, IBM AUX, Mac OS X 10.6 or later, SAP R3, NDPS Gateway, IBM Series/AS/400° using 05/400 Host Print Transform, Citrix Presentation Server 4.5/ Citrix Xen App 5.0, 6.0, 6.5	Print Password Encryption Authentication, Quota Se over SSL and PDF encrypt Optional Hardwa Paper Handling & Cab One-Tray Paper Bank (I Paper Capacity Supported Paper Vieigh Dimensions (WXDXH) Two-Tray Paper Bank (I Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Tandem Large Capacity Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Side Large Capacity Tra Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) Side Large Capacity Tra Paper Capacity Supported Paper Weigh Dimensions (WXDXH) Cabinet Type F <sup>1</sup> Dimensions (WXDXH) Weight Output Trays & Finish Internal Shift-Sort Tray Paper Capacity	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li>ine</li> <li>ine Options</li> <li>PB3150)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>55° x 8.5° to 11° x 17° (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1° x 27° x 4.7° (S87 x 685 x 120 mm)</li> <li>PB3220)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5° x 8.5° to 11° x 17° (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1° x 27° x 9.7° (S87 x 685 x 247 mm)</li> <li>7 Tay (PB3230)<sup>1</sup></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5° x 11° (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1° x 27° x 9.7° (S87 x 685 x 247 mm)</li> <li>7 Tay (PB3230)<sup>1</sup></li> <li>1,500 sheets</li> <li>8.5° x 11° (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1° x 27° x 9.7° (S87 x 685 x 247 mm)</li> <li>193 (RT3030)<sup>4</sup></li> <li>1,500 sheets</li> <li>8.5° x 11° (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m²)</li> <li>23.1° x 26.7° x 10° (S86 x 679 x 256 mm)</li> <li>Less than 29.3 lbs. (13.25 kg)</li> <li>er Options</li> <li>(SH3070)<sup>2</sup></li> <li>250 sheets (8.5° x 11° or smaller) (A4 – A5)</li> <li>125 sheets (8.5° x 11° or smaller) (A4 – A5)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3Hole Punch Unit (P (Optional; Installs inside SF <b>Additional Access</b> Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type S, ESP XG-PCS-15D, 1 Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br 64MB, OCR Unit Type M2, PostScript3 Unit Type M12 Smart Card Reader Built-ir Type M3, XPS Direct Print Option Type M12 Note: Some accessories requir for other options. Some image stabilizers that ship with the o Some options may not be ava Specifications are subject to d	Shift Tray: 1,000 sheets (8.5" x 11" or smaller) (A4) 500 sheets (8.5" x 14" or larger) (B4 – A3) Booklet Tray: 20 Sets (2 – 5 sheets), 10 Sets (6 – 10 sheets) & 7 Sets (11 – 15 sheets) Normal Staple: 50 sheets (8.5" x 11") (A4), 30 sheets (8.5" x 14" or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 11" – 11" x 17" (A4 – A3) Saddle Stitch: 8.5" x 50000000000000000000000000000000000
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDP) Weight **Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating Systems	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1 * x 26.8 * x 35.9 * (587 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> S33MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802.11a/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 1284 Parallel TCP/P (IPv4, IPv6), IPV/SPX* Windows Vista/7/8/XP, Windows Server 2003/2003P2/2008/2008/2/012/2012R2; Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer, Red Hat Linux, IBM Atk, Mac OS X 10.6 or later, SAP R/3, NDPS Gateway, IBM Series/AS/400' using OS/400 Host Print Transform, Citrix Presentation Server 4.5/ Citrix Xen App 5.0, 6.0, 6.5 Web Image Monitor, Embedded @Remote, @Remote Office Appliance, @Remote	Print Password Encryption Authentication, Quota Se over SSL and PDF encryption <b>Optional Hardwa</b> <b>Paper Handling &amp; Cab</b> <b>One-Tray Paper Bank (</b> Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDXH) <b>Two-Tray Paper Bank (</b> Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Veigh Dimensions (WxDXH) <b>Tandem Large Capacity</b> Paper Capacity Supported Paper Veigh Dimensions (WxDXH) <b>Side Large Capacity Tra</b> Paper Capacity Supported Paper Sizes Supported Paper Veigh Internal Shift-Sort Tray Paper Capacity Supported Paper Sizes Supported Paper Veigh Bin Tray (BN3110)	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li><b>ine Options</b></li> <li><b>PB3150</b>)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>557 x 85<sup>+</sup> to 11<sup>+</sup> x 17<sup>+</sup> (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 4.7<sup>+</sup> (587 x 685 x 120 mm)</li> <li><b>PB3220</b>)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5<sup>+</sup> x 8.5<sup>+</sup> to 11<sup>+</sup> x 17<sup>+</sup> (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 9.7<sup>+</sup> (587 x 685 x 247 mm)</li> <li><b>7 Tay (PB3230)<sup>1</sup></b></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5<sup>+</sup> x 11<sup>+</sup> (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 9.7<sup>+</sup> (587 x 685 x 247 mm)</li> <li><b>7 Tay (PB3230)<sup>1</sup></b></li> <li>1,500 sheets</li> <li>8.5<sup>+</sup> x 11<sup>+</sup> (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 9.7<sup>+</sup> (587 x 685 x 247 mm)</li> <li><b>1</b>,500 sheets</li> <li>8.5<sup>+</sup> x 11<sup>+</sup> (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 11.4<sup>+</sup> (340 x 545 x 290 mm)</li> <li>23.1<sup>+</sup> x 26.7<sup>+</sup> x 10<sup>+</sup> (586 x 679 x 256 mm)</li> <li>Less than 29.3 lbs. (13.25 kg)</li> <li><b>er Options</b></li> <li><b>(SH3070)<sup>2</sup></b></li> <li>250 sheets (8.5<sup>+</sup> x 11<sup>+</sup> or rarger) (B4 – A3)</li> <li>5.5<sup>+</sup> x 8.5<sup>+</sup> to 12<sup>+</sup> x 18<sup>+</sup> (A6 – A3)</li> <li>t 1 – 80 lb. Bond/166 lb. Index (52 – 300 g/m<sup>2</sup>)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2/3-Hole Punch Unit (P (Optional; Installs inside Sf <b>Additional Accesss</b> Bridge Unit BU3070, Brow Type 352, Copy Data Sec Type S, ESP XG-PCS-15D, 1 Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter BF 64MB, Oc R Unit Type M12 Smart Card Reader Built-in- Type M3, XPS Direct Print Option Type M12 Note: Some accessories requin for other options. Some image stabilizers that ship with the o Some options may not be ava Specifications are subject to d For maximum performance an	Shift Tray: 1,000 sheets ( $8.5^{\circ} \times 11^{\circ}$ or smaller) (A4) 500 sheets ( $8.5^{\circ} \times 14^{\circ}$ or larger) (B4 – A3) Booklet Tray: 20 Sets ( $2 - 5$ sheets), 10 Sets ( $6 - 10$ sheets) & 7 Sets ( $1 - 15$ sheets) Normal Staple: 50 sheets ( $8.5^{\circ} \times 11^{\circ}$ ) (A4), 30 sheets ( $8.5^{\circ} \times 14^{\circ}$ or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Saddle Stitch: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Saddle Stitch: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Top, Bottom, 2 Staples, Booklet 22.2° $\times 24.4^{\circ} \times 37.8^{\circ}$ ( $563 \times 620 \times 960$ mm) <b>U3050NA</b> ) 83150 or SR3140 Finishers) <b>ScrU Options</b> Ser Unit Type M12, Card Reader Bracket uity Unit Type G, Embedded HotSpot Fax Connection Unit Type M12, File Format face Unit Type M12, File Format face Unit Type M12, File Format face Unit Type M12, Smart Operation Panel Optional Counter Interface Unit Type M12, . 9D Card for NetWare Printing Type M12, . 0D tional Counter Interface Unit Type M12, . 10Lit Type M12, USB Device Server e additional equipment or may be prerequisites scontained in this brochure do not show the ptional paper Feed units. lable at the time of market release. tange without notice. d yield, we recommend using genuine Ricoh
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only *Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating Systems	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (S87 x 680 x 913 mm) 151 lbs., 68.5 kg ion by ENERGY STAR program <b>ns (Standard)</b> S33MHz Standard: 10Base-T/100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802.11a/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 1284 Parallel TCP/P (IPv4, IPv6), IPX/SPX* Windows Vista7//8/XP, Windows Server 2003/2008/2/2008/2/2012/2012R2, Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer, Red Hat Linux, IBM AUX, Mac OS X 10.6 or later, SAP R3, NDPS Gateway, IBM Series/AS/400° using 05/400 Host Print Transform, Citrix Presentation Server 4.5/ Citrix Xen App 5.0, 6.0, 6.5	Print Password Encryption Authentication, Quota Se over SSL and PDF encryption <b>Optional Hardwa</b> <b>Paper Handling &amp; Cab</b> <b>One-Tray Paper Bank (</b> Paper Capacity Supported Paper Vieigh Dimensions (WXDXH) <b>Two-Tray Paper Bank (</b> Paper Capacity Supported Paper Weigh Dimensions (WXDXH) <b>Tandem Large Capacity</b> Paper Capacity Supported Paper Vieigh Dimensions (WXDXH) <b>Side Large Capacity</b> Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) <b>Side Large Capacity</b> Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Vieigh Dimensions (WXDXH) <b>Cabinet Type F</b> <sup>1</sup> Dimensions (WXDXH) Weight <b>Output Trays &amp; Finish</b> <b>Internal Shift-Sort Tray</b> Paper Capacity Supported Paper Sizes Supported Paper Sizes	h, Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion ion ire Accessories inet Options *P3150)*5 550 sheets x 1 tray 5.5* x 8.5* to 11* x 17* (A5 – A3) t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m) 23.1* x 27* x 4.7* (587 x 685 x 120 mm) *P3220)* (1,100 sheets (550 sheets x 2 trays) 5.5* x 8.5* to 11* x 17* (A5 – A3) t 16– 80 lb. Bond/166 lb. Index (60 – 300 g/m) 23.1* x 27* x 9.7* (587 x 685 x 247 mm) *Tray (PB3230)* (2,000 sheets (1,000 sheets x 2) 8.5* x 11* (A4) t 6–80 lb. Bond/166 lb. Index (60 – 300 g/m) 2.3.1* x 27* x 9.7* (587 x 685 x 247 mm) *Tray (PB3230)* (2,000 sheets (1,000 sheets x 2) 8.5* x 11* (A4) t 6–80 lb. Bond/166 lb. Index (60 – 300 g/m) 2.3.1* x 27* x 9.7* (587 x 685 x 247 mm) *URT3030* 1,500 sheets 8.5* x 11* (A4) t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m) 2.3.1* x 27* x 9.7* (586 x 679 x 256 mm) Less than 29.3 lbs. (13.25 kg) er Options (SH3070) <sup>2</sup> 250 sheets (8.5* x 11* or smaller) (A4 – A5) 125 sheets (8.5* x 11* or smaller) (A4 – A3) 5.5* x 8.5* to 12* x 18* (A6 – A3) t 14 – 80 lb. Bond/166 lb. Index (52 – 300 g/m)	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2/3-Hole Punch Unit (P (Optional; Installs inside Sf <b>Additional Accesss</b> Bridge Unit BU3070, Brow Type 352, Copy Data Sec Type S, ESP XG-PCS-15D, 1 Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter BF 64MB, OCR Unit Type M12 Smart Card Reader Built-in- Type M3, XPS Direct Print Option Type M12 Note: Some accessories requin for other options. Some image stabilizers that ship with the o Some options may not be ava Specifications are subject to d For maximum performance an parts and supplies. <sup>1</sup> Cannot be installed together <sup>2</sup> Cannot be installed together	Shift Tray: 1,000 sheets ( $8.5^{\circ} \times 11^{\circ}$ or smaller) (A4) 500 sheets ( $8.5^{\circ} \times 14^{\circ}$ or larger) (B4 – A3) Booklet Tray: 20 Sets ( $2 - 5$ sheets), 10 Sets ( $6 - 10$ sheets) & 7 Sets ( $11 - 15$ sheets) Normal Staple: 50 sheets ( $8.5^{\circ} \times 11^{\circ}$ ) (A4), 30 sheets ( $8.5^{\circ} \times 14^{\circ}$ or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Saddle Stitch: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Saddle Stitch: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Top, Bottom, 2 Staples, Booklet 22.2° $\times 24.4^{\circ} \times 7.8^{\circ}$ ( $563 \times 620 \times 960$ mm) <b>U3050NA</b> ) 83150 or SR3140 Finishers) <b>Scry Options</b> Ser Unit Type M12, Card Reader Bracket urity Unit Type G, Embedded HotSpot Fax Connection Unit Type M12, File Format face Unit Type M12, LEE 1284 Interface adb/g/n Interface Unit Type M12, Optional Counter Interface Unit Type M12, .9D Card for NetWare Printing Type M12, .9D Card for NetWa
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only *Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating Systems	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Wagazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (587 x 680 x 913 mm) 151 lbs., 68.5 kg Ion by ENERGY STAR program <b>ns (Standard)</b> 533MHz Standard: 10Base-17100/1000BaseTX Ethernet, USB2.0 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802.11a/b/g/n Wireless LAN, USB Device Server (second NIC), & IEEE 1284 Parallel TCP/IP (IPv4, IPv6), IPV/SPX* Windows Vista7//8/XP, Windows Server 2003/2003R2/2008R2/2012/2012R2; Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer, Red Hat Linux, IBM AIX, Mac OS X 10.6 or later; SAP H03, NDPS Gateway, IBM ISeries/AS/400" using OS/400 Host Print Transform, Citrix Presentation Server 4.5/ Citrix Xen App 5.0, 6.0, 6.5	Print Password Encryption Authentication, Quota Se over SSL and PDF encryption <b>Optional Hardwa</b> <b>Paper Handling &amp; Cab</b> <b>One-Tray Paper Bank (</b> Paper Capacity Supported Paper Vieigh Dimensions (WXDXH) <b>Two-Tray Paper Bank (</b> Paper Capacity Supported Paper Weigh Dimensions (WXDXH) <b>Tandem Large Capacity</b> Paper Capacity Supported Paper Vieigh Dimensions (WXDXH) <b>Side Large Capacity</b> Supported Paper Sizes Supported Paper Sizes Supported Paper Weigh Dimensions (WXDXH) <b>Side Large Capacity</b> Paper Capacity Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Sizes Supported Paper Vieigh Dimensions (WXDXH) <b>Cabinet Type F</b> <sup>1</sup> Dimensions (WXDXH) Weight <b>Output Trays &amp; Finish</b> <b>Internal Shift-Sort Tray</b> Paper Capacity Supported Paper Sizes Supported Paper Sizes	<ul> <li>Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion</li> <li><b>ine Options</b></li> <li><b>PB3150</b>)<sup>15</sup></li> <li>550 sheets x 1 tray</li> <li>557 x 85<sup>+</sup> to 11<sup>+</sup> x 17<sup>+</sup> (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 4.7<sup>+</sup> (587 x 685 x 120 mm)</li> <li><b>PB3220</b>)<sup>1</sup></li> <li>1,100 sheets (550 sheets x 2 trays)</li> <li>5.5<sup>+</sup> x 8.5<sup>+</sup> to 11<sup>+</sup> x 17<sup>+</sup> (A5 – A3)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 9.7<sup>+</sup> (587 x 685 x 247 mm)</li> <li><b>7 Tay (PB3230)<sup>1</sup></b></li> <li>2,000 sheets (1,000 sheets x 2)</li> <li>8.5<sup>+</sup> x 11<sup>+</sup> (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 9.7<sup>+</sup> (587 x 685 x 247 mm)</li> <li><b>7 Tay (PB3230)<sup>1</sup></b></li> <li>1,500 sheets</li> <li>8.5<sup>+</sup> x 11<sup>+</sup> (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 9.7<sup>+</sup> (587 x 685 x 247 mm)</li> <li><b>1</b>,500 sheets</li> <li>8.5<sup>+</sup> x 11<sup>+</sup> (A4)</li> <li>t 16 – 80 lb. Bond/166 lb. Index (60 – 300 g/m<sup>2</sup>)</li> <li>23.1<sup>+</sup> x 27<sup>+</sup> x 11.4<sup>+</sup> (340 x 545 x 290 mm)</li> <li>23.1<sup>+</sup> x 26.7<sup>+</sup> x 10<sup>+</sup> (586 x 679 x 256 mm)</li> <li>Less than 29.3 lbs. (13.25 kg)</li> <li><b>er Options</b></li> <li><b>(SH3070)<sup>2</sup></b></li> <li>250 sheets (8.5<sup>+</sup> x 11<sup>+</sup> or rarger) (B4 – A3)</li> <li>5.5<sup>+</sup> x 8.5<sup>+</sup> to 12<sup>+</sup> x 18<sup>+</sup> (A6 – A3)</li> <li>t 1 – 80 lb. Bond/166 lb. Index (52 – 300 g/m<sup>2</sup>)</li> </ul>	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF <b>Additional Access</b> Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type 3252, Copy Data Sec Type 3252, Copy Data Sec Type XG-PCS-15D, I Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br 64MB, OCR Unit Type M2, PostScript3 Unit Type M12 Note: Some accessories requir for other options. Some image stabilizers that ship with the o Some options may not be ava Specifications are subject to d For maximum performance an parts and supplies. <sup>1</sup> Cannot be installed togethe <sup>2</sup> Cannot be installed togethe <sup>3</sup> Requires Bridge Unit BU307	Shift Tray: 1,000 sheets ( $8.5^{\circ} \times 11^{\circ}$ or smaller) (A4) 500 sheets ( $8.5^{\circ} \times 14^{\circ}$ or larger) (B4 – A3) Booklet Tray: 20 Sets ( $2 - 5$ sheets), 10 Sets ( $6 - 10$ sheets) & 7 Sets ( $11 - 15$ sheets) Normal Staple: 50 sheets ( $8.5^{\circ} \times 11^{\circ}$ ) (A4), 30 sheets ( $8.5^{\circ} \times 14^{\circ}$ or larger) (B4 – A3) Saddle Stitch: 15 sheets Normal Staple: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Saddle Stitch: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Saddle Stitch: $8.5^{\circ} \times 11^{\circ} - 11^{\circ} \times 17^{\circ}$ ( $A4 - A3$ ) Top, Bottom, 2 Staples, Booklet 22.2° $\times 24.4^{\circ} \times 7.8^{\circ}$ ( $563 \times 620 \times 960$ mm) <b>U3050NA</b> ) 83150 or SR3140 Finishers) <b>Scry Options</b> Ser Unit Type M12, Card Reader Bracket urity Unit Type G, Embedded HotSpot Fax Connection Unit Type M12, File Format face Unit Type M12, LEE 1284 Interface adb/g/n Interface Unit Type M12, Optional Counter Interface Unit Type M12, .9D Card for NetWare Printing Type M12, .9D Card for NetWa
Zoom Range Standard Features Dimensions (WxDxH) (includes ARDF) Weight *Bypass Tray only *Typical electricity consumpt <b>Print Specification</b> Processor Speed Connection Type Network Protocols Supported Operating Systems	25% to 400% in 1% increments Auto Paper Select, Auto Tray Switch, Booklet/Magazine Copy, Center/Border Erase, Chapters, Combine Mode, Cover Insertion, Document Server (3,000 File Capacity), Duplex, Electronic/Rotate Sorting, Full-Color VGA Touch Screen Control Panel, ID Card Copy, 8 Job Presets, 25 Job Programs, Negative/Positive, OHP Slip Sheet, Sample Copy, Series Copy, Simple Screen, 1,000 User Codes, User Stamps 23.1" x 26.8" x 35.9" (S87 x 680 x 913 mm) 151 lbs., 68.5 kg Simon by ENERGY STAR program <b>Distribus</b> , 68.5 kg Simon by ENERGY STAR program <b>Distribus</b> , 20 (2 ports on back of device, 1 port on Operation Panel), SD slot on Operation Panel, USB2.0 Type A, USB2.0 Type B, & SD Card Slot Optional: IEEE 802.11a/br/g/n Wireless LAN, USB Device Server (second NIC), & LIEEE 124A Parallel TCP/IP (IPv4, IPv6), IPX/SPX* Windows Vista/7/8X/R, Windows Server 2003/2008/2/2008/2/2012/2012R2; Netware* 6.5 or later, Unix Filters for Sun Solaris, HP-UX, SCO OpenServer, Red Hat Linux, IBM AIX, Mac OS X 10.6 or later, SAP R3, NDPS Gateway, IBM Series/AS400° using OS/400 Host Print Transform, Citrix Presentation Server 4.5/ Citrix Xen App 5.0, 6.0, 6.5 Web Image Monitor, Embedded @Remote, @Remote Office Appliance, @Remote Enterprise Pro, Device Manager NX Lite and Accounting, Device Manager NX Pro	Print Password Encryption Authentication, Quota Se over SSL and PDF encryption <b>Optional Hardwa</b> <b>Paper Handling &amp; Cab</b> <b>One-Tray Paper Bank (</b> Paper Capacity Supported Paper Sizes Supported Paper Weigh Dimensions (WxDxH) Weight <b>Output Trays &amp; Finish</b> <b>Internal Shift-Sort Tray</b> Paper Capacity Supported Paper Sizes Supported Paper Weigh Paper Capacity <b>250-Sheet Internal Staf</b>	h, Address Book Encryption, SSL, User titing/Account Limit, SNMP v3, SMTP ion ion <b>re Accessories</b> inet Options <b>P3150</b> ) <sup>15</sup> 550 sheets x 1 tray 5.5' x 8.5' to 11' x 17" (A5 – A3) t 16 = 80 lb. Bond/166 lb. Index (60 – 300 g/m') 23.1' x 27' x 4.7" (S87 x 685 x 120 mm) <b>P83220</b> ) <sup>1</sup> 1.100 sheets (550 sheets x 2 trays) 5.5' x 8.5' to 11' x 17" (A5 – A3) t 16 = 80 lb. Bond/166 lb. Index (60 – 300 g/m') 23.1' x 27' x 9.7" (S87 x 685 x 247 mm) <b>7 tray (P83230)</b> <sup>1</sup> 2,000 sheets (1,000 sheets x 2) 8.5' x 11" (A4) t 16 = 80 lb. Bond/166 lb. Index (60 – 300 g/m') 23.1' x 27' x 9.7" (S87 x 685 x 247 mm) <b>7 tray (P83230)</b> <sup>1</sup> 1,500 sheets 8.5' x 11" (A4) t 16 = 80 lb. Bond/166 lb. Index (60 – 300 g/m') 23.1' x 27' x 9.7" (S87 x 685 x 247 mm) <b>15</b> (S1300) <sup>4</sup> 1,500 sheets 8.5' x 11" (A4) t 16 = 80 lb. Bond/166 lb. Index (60 – 300 g/m') 23.1' x 26.7" x 10" (S86 x 679 x 256 mm) Less than 29.3 lbs. (13.25 kg) <b>er Options</b> (SH3070) <sup>2</sup> 250 sheets (8.5" x 11" or smaller) (A4 – A5) 125 sheets (8.5" x 11" or larger) (84 – A3) 5.5" x 8.5" to 11" x 17" (A6 – A3) t 14 – 80 lb. Bond/166 lb. Index (52 – 300 g/m')	Staple Paper Size Staple Paper Weight Staple Positions Dimensions (WxDxH) 2-/3-Hole Punch Unit (P (Optional; Installs inside SF <b>Additional Access</b> Bridge Unit BU3070, Brow Type 3352, Copy Data Sec Type 3252, Copy Data Sec Type 3252, Copy Data Sec Type XG-PCS-15D, I Converter Type E, G3 Inter Board Type A, IEEE 802.11 Type M12, Key Counter Br 64MB, OCR Unit Type M2, PostScript3 Unit Type M12 Note: Some accessories requir for other options. Some image stabilizers that ship with the o Some options may not be ava Specifications are subject to d For maximum performance an parts and supplies. <sup>1</sup> Cannot be installed togethe <sup>2</sup> Cannot be installed togethe <sup>3</sup> Requires Bridge Unit BU307	Shift Tray: 1,000 sheets ( $8.5^* \times 11^*$ or smaller) (A4) 500 sheets ( $8.5^* \times 14^*$ or larger) ( $84 - A3$ ) Booklet Tray: 20 Sets ( $2 - 5$ sheets), 10 Sets ( $6 - 10$ sheets) & 7 Sets ( $11 - 15$ sheets) Normal Staple: 50 sheets ( $8.5^* \times 11^*$ ) (A4), 30 sheets ( $8.5^* \times 14^*$ or larger) ( $84 - A3$ ) Saddle Stitch: 15 sheets Normal Staple: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ ( $A4 - A3$ ) Saddle Stitch: $8.5^* \times 11^* - 11^* \times 17^*$ Saddle Stitch: $8.5^* \times 10^* \times 10$



K)

Adobe: PDF

Cert no. SW-COC-00252 www.fsc.org © 1996 Forest Stewardship Co

Ricoh Americas Corporation, 70 Valley Stream Parkway, Malvern, PA 19355, 1-800-63-RICOH Ricoh and the Ricoh Logo are registered trademarks of Ricoh Company, Ltd. All other trademarks are the property of their respective owners. @2014 Ricoh Americas Corporation. All rights reserved. The content of this document, and the appearance, features and specifications of Ricoh products and services are subject to change from time to time without notice. Products are shown with optional features. While care has been taken to ensure the accuracy of this information, Ricoh makes no representation or warranties about the accuracy, completeness or adeque of the information contained herein, and shall not be liable for any errors or omissions in these materials. Actual results will vary depending upon use of the products and services are as set forth in the express warranty statements accompanying them. **8330** R3530

www.ricoh-usa.com